



DX117 Single Console

**1920 x 1200
WUXGA**



Drawer Features & Display Benefits

- ▶ 1U dual slide 17" widescreen LCD console drawer
- ▶ 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ Support **Full HD** with 1080p resolution
- ▶ 104-key keyboard with touchpad
- ▶ SUN Micro or MAC keyboard options available
- ▶ Enhanced aesthetics with new molded front panel and two point lock

Options

- 3G / HD / SD-SDI Broadcast-grade input
- S-Video + Composite (BNC), HDMI or Audio input
- 48V, 24V or 12VDC power

Specifications

• LCD Panel

| | |
|------------------------|----------------------|
| Size (diagonal) : | 17.1" widescreen TFT |
| Max resolution : | 1920 x 1200 |
| Brightness (cd/m2) : | 210 |
| Backlight : | LED |
| Colors : | 16.7 M, 8-bit |
| Contrast ratio (typ) : | 600 : 1 |
| Viewing angle (H/V) : | 130° x 110° |
| Active area (mm) : | 367 x 230 |
| MTBF (hrs) : | 20,000 |
| Signal input : | VGA or DVI-D |

• Casing Color :

Black (RAL 9005)

• Weight

| | |
|---------|------------------------|
| Net : | 12 kgs (26.4 lbs) |
| Gross : | 18 kgs (39.6 lbs) |

• Environmental

| | |
|---------------------|-------------------------------------|
| Operating : | 0 to 50°C Degree |
| Storage : | -5 to 60°C Degree |
| Relative humidity : | 5~90%, non-condensing |
| Shock : | 10G acceleration (11 ms duration) |
| Vibration : | 5~500Hz 1G RMS random vibration |

• Regulatory

| | |
|-----------------|-------------------------|
| Safety : | FCC & CE certified |
| Environmental : | RoHS2 & REACH compliant |

• Power

| | |
|---------------|---------------------------------------|
| Input : | Auto-sensing 100 to 240VAC, 50 / 60Hz |
| Consumption : | Max. 48 Watt, Standby 5 Watt |

• Dimensions

| | |
|-----------|---|
| Product : | 441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch |
| Packing : | 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch |

Console Cable

CX-6

- 6 feet DVI-D console cable (bundle)
- DVI-D + USB, server end
- DVI-D + DB15 (USB KB & MS), console port



or

CB-6

- 6 feet VGA console cable (alternative)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port

Standard Keyboard

Ge G keyboard integrated with touchpad

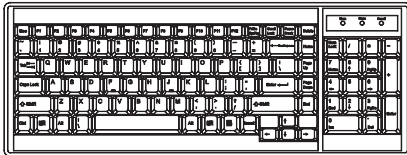

Supporting layouts

| | | | | | |
|----------------|----------------|---------|-------------|-------------|----------|
| America | | | | | |
| | United States | | | | |
| EMEA | | | | | |
| | United Kingdom | Germany | France | Spain | Norway |
| | | | | | |
| | Italy | Russia | Switzerland | Netherlands | Portugal |
| Asia | | | | | |
| | China | Japan | Korea | Arabia | Turkey |

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad





1U Dual Slide 17" Ultra High Resolution LCD KVM Drawer





- **Dimensions (with KVM)**
 Product : 441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch
 Packing : 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch
- **Weight (Net / Gross)**
 Net : 13 kgs (28.6 lbs)
 Gross : 19 kgs (41.8 lbs)
- **Casing Color :** Black (RAL 9005)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf




| Matrix DB-15 KVM |  | |  | 8-port | 16-port | 32-port | |
|---------------------|---|--------|---|---------------|----------------|-----------------|---|
| | Local | Remote | | | | | |
| | 1 | 1 | | 1 | DX117 - MIP813 | DX117 - MIP1613 | - |
| | 1 | 1 | | 2 | DX117 - MIP824 | DX117 - MIP1624 | - |
| | 1 | 1 | | 0 | DX117 - M802 | DX117 - M1602 | - |
| | 1 | 2 | | 0 | DX117 - M803 | DX117 - M1603 | - |
| 1 | 3 | 0 | DX117 - M804 | DX117 - M1604 | - | | |

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

| Combo DB-15 KVM |  | |  | 8-port | 16-port | 32-port | |
|--------------------|---|--------|---|---------------|---------------|----------------|---|
| | Local | Remote | | | | | |
| | 1 | 0 | | 1 | DX117 - IP802 | DX117 - IP1602 | - |
| | 1 | 1 | | 0 | DX117 - 802 | DX117 - 1602 | - |
| 1 | 0 | 0 | DX117 - S801 | DX117 - S1601 | - | | |

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

| DVI-D KVM |  | |  | 12-port | | |
|---|---|--------|---|---------------|---|---|
| | Local | Remote | | | | |
|  | 1 | 0 | 0 | DX117 - 1201D | - | - |

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)