



RKP2417 / 2419 Single Console



Drawer Features & Display Benefits

- ▶ 2U dual slide 17" or 19" LCD console drawer
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ SUN Micro or MAC keyboard options available
- ▶ Short depth design of 480mm (18.9")
- ▶ New enhanced aesthetics with molded front handle
- ▶ 2 post rack mounting available

Options

- S-Video + Composite (BNC) or Audio input
- HDMI or DVI-D (either one)
- 17" / 19" Touchscreen : Capacitive, Resistive
- 48V, 24V or 12VDC power

Specifications

• LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Max resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	CCFL	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	160° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	50,000	30,000
Signal input :	VGA	VGA

• Casing Color :

Black (RAL 9005)

• Weight (Single console)

Net :	20.4 kgs (44.9 lbs)	20.5 kgs (45.1 lbs)
Gross :	24.8 kgs (54.6 lbs)	24.8 kgs (54.6 lbs)

• Environmental

Operating :	0 to 50°C Degree
Storage :	-5 to 60°C Degree
Relative humidity :	5~90%, non-condensing
Shock :	10G acceleration (11 ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Power

Input :	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption :	Max. 48 Watt, Standby 5 Watt

• Dimensions (Single console)

Product :	441.6 x 480 x 88 mm / 17.4 x 18.1 x 3.5 inch
Packing :	585 x 620 x 190 mm / 23 x 24.4 x 7.5 inch


Console Cable

CE-6


- 6 feet Combo KVM cable (bundle)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port

Standard Keyboard

Ge G keyboard integrated with touchpad

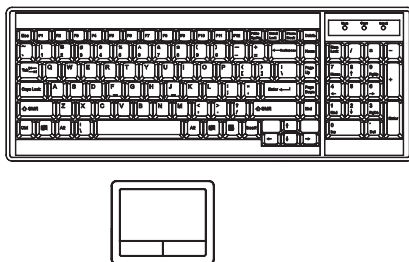

Gb G keyboard integrated with trackball

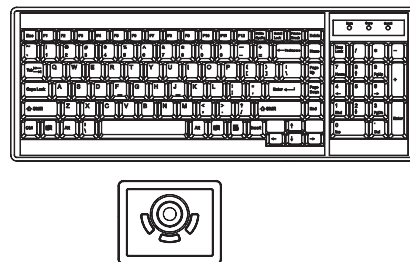

Supporting layouts

America		United States								
EMEA		United Kingdom		Germany		France		Spain		Norway
		Italy		Russia		Switzerland		Netherlands		Portugal
Asia		China		Japan		Korea		Arabia		Turkey

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Mb Mac keyboard with trackball

Se S keyboard with touchpad

Sb S keyboard with trackball



2U Dual Slide 17" / 19" Short Depth LCD KVM Drawer



• Dimensions (with KVM)

Product : 441.6 x 480 x 88 mm / 17.4 x 18.9 x 3.5 inch

Packing : 585 x 620 x 190 mm / 23 x 24.4 x 7.5 inch

• Weight (Net / Gross)

RKP2417 : 21.1 kgs (46.4 lbs) / 27 kgs (59.4 lbs)

RKP2419 : 21.5 kgs (47.3 lbs) / 27.4 kgs (60.3 lbs)

• Casing Color : Black (RAL 9005)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

X stands for 17" or 19" LCD size.

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	RKP241X - MUIP1613	RKP241X - MUIP3213
	1	1	2	-	RKP241X - MUIP1624	RKP241X - MUIP3224
	1	1	0	-	RKP241X - MU1602	RKP241X - MU3202
	1	2	0	-	RKP241X - MU1603	RKP241X - MU3203
	1	3	0	-	RKP241X - MU1604	RKP241X - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	RKP241X - UIP802	RKP241X - UIP1602	RKP241X - UIP3202
	1	1	0	RKP241X - U802	RKP241X - U1602	RKP241X - U3202
	1	0	0	RKP241X - U801	RKP241X - U1601	RKP241X - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	RKP241X - MIP813	RKP241X - MIP1613	-
	1	1	2	RKP241X - MIP824	RKP241X - MIP1624	-
	1	1	0	RKP241X - M802	RKP241X - M1602	-
	1	2	0	RKP241X - M803	RKP241X - M1603	-
	1	3	0	RKP241X - M804	RKP241X - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	RKP241X - IP802	RKP241X - IP1602	-
	1	1	0	RKP241X - 802	RKP241X - 1602	-
	1	0	0	RKP241X - S801	RKP241X - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	RKP241X - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)